

# HOME ROOM

SKU: 472120    MAP: \$399.99

## FEATURES

- Boosts cellular signals for a workspace area at home or small office.
- For multiple devices and users.
- Works on ALL cellular devices with ALL carriers simultaneously.
- Enhances talk, text, and high-speed internet.

**⚠️ WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## ABOUT

The **Home Room** ensures you get better voice and data with fewer dropped calls, improved voice quality, faster uploads and downloads. This premier home signal booster can increase cell signals up to 32x while enhancing cellular signals.

weBoost's Home Room is compatible with all US networks including Verizon, AT&T, T-Mobile, US Cellular, and more. Each device comes with everything you need for complete installation including an indoor antenna, outdoor antenna, power supply, 30' cable, and trained support staff on call to assist with the DIY installation.

All boosters come with a 2-year warranty.

## COVERAGE AREA

IF THE CELL SIGNAL OUTSIDE YOUR HOME IS:	YOUR BOOSTED CELL SIGNAL WILL COVER:
Strong	→ Large Room
Medium	→ Medium Room
Weak	→ Small Room
None	→ None



- BOOSTS SIGNAL ON ALL AVAILABLE NETWORK SPEEDS
- UP TO +60 dB GAIN
- MULTI-USER WIRELESS BOOSTER

## KIT INCLUDES



Home Room



Outside Panel Antenna (311155)



Inside Desktop Antenna (301211)



Power Supply (850012)



30' White Low Loss RG6 (75ohm) Coax Cable (x2) (950630)




Flat Window Cable (951177)

## SPECIFICATIONS

MODEL NUMBER	472120+	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 2	1900 MHz
MAX GAIN	60 dB	
IMPEDANCE	75 Ohm	
POWER	110-240V AC, 50-60 Hz, 8 W	
CONNECTORS	SMA Female / F-Female	
BOOSTER DIMENSIONS	6.5 × 4.25 × 1.25 in.	
BOOSTER WEIGHT	0.445 lbs.	

## INSTALLATION

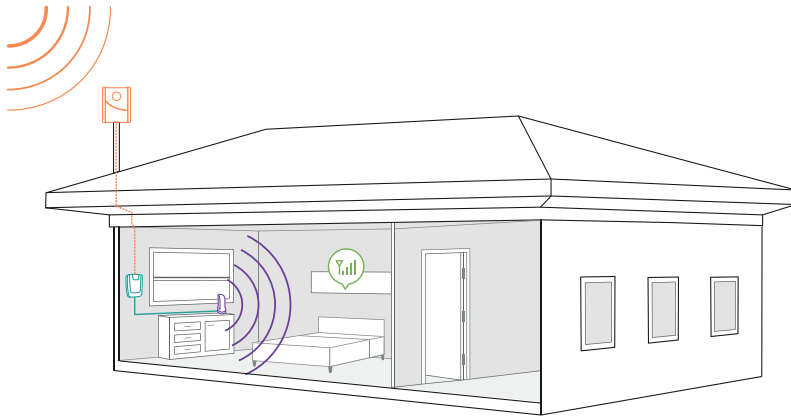

- 1 Receives signal:** The powerful antenna reaches out to access voice and data signals, and delivers it to the booster.
- 2 Boost signal:** The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.
- 3 Broadcasts signal:** Your devices get a stronger signal, and calls and data are fed through the booster back to the network.

## AVAILABLE ACCESSORIES

Optional Antenna Kits



Lightning Surge Protector 75 Ohm  
859992†



RG-6 F-Male / F-Male, 2ft. White Cable  
950602†



20 ft. White RG6 Low Loss Coax  
950620\*




F-Female to F-Female Barrel Connector  
971129\*




Inside Antenna Upgrade Kit  
304447\*

## PACKAGE DIMENSIONS


5.25 L x 14.5 W x 11.25 H



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: 25 L x 18 W x 16 H | 43 Lbs. | QTY 6

## SUPPORT



2-Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660  
Monday to Saturday



FOR PARTNER'S USE

UPC

