




WILSONPRO™

A Wilson Electronics Brand

Instruction Guide

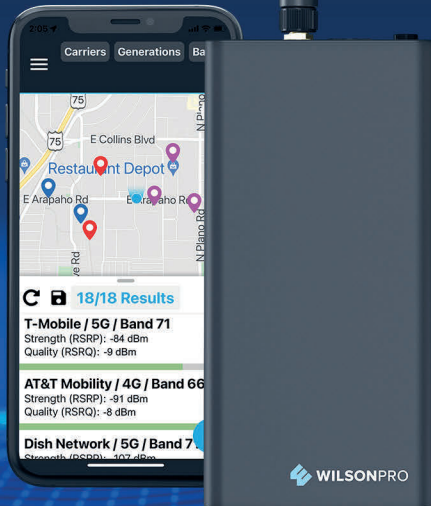

Cellular Network Scanner 5G

Index

Features	1
Kit Contents	2
To Get Up & Running	3
Antenna Connection	6
App Screen Examples	7
Outdoor Antenna Wizard Overview	14
Warranty	20

Features

- Pairs with any Bluetooth-enabled iOS (v10.0 or later) or Android (v5.0 or later) device using the free Cell LinQ App.
- Reports detected LTE and 5G Signal strength for the following bands:
Band 1, Band 3, Band 4, Band 5, Band 7, Band 8, Band 12, Band 13, Band 14, Band 20, Band 25, Band 28, Band 48, Band 66, Band 71, and Band 77.
- Identifies all available signals from major cellular network service providers Verizon, T-Mobile, AT&T and others EVEN IF YOUR CONNECTED ANDROID OR iOS DEVICE IS NOT SUBSCRIBED TO THOSE NETWORKS.
- Cell Tower Mapping, showing approximate location of carrier cell tower.
- Fast Scan Time: Complete scan in under four minutes.
- Easy Project Management: Organize projects, save and retrieve scans online. Export & email in spreadsheet format.
- Outdoor Antenna Wizard: See what bands are supported with preferred carriers using the directional outdoor antenna.

Kit Contents



Cellular Network
Scanner & Antenna



Power Supply &
Charger Cable



40 in. N Female to
SMA Female

To Get Up & Running

Charging

Your Cellular Network Scanner should come with some charge, but fully charging the scanner will give you several hours of scans.

Lights

- Green Fast = Power On, Initializing
- Green Solid = Power On, Ready
- Red = Charging
- Blue Slow = Scan in Process
- Blue Solid = Error (Power Cycle the Meter)



Download App

The scanner will only work with the **Cell LinQ** app. Download and install the app from either Google Play or Apple app store.

Once you launch the app, you will be prompted to register your cloud account.




Connect Cellular Network Scanner & App

With the scanner charged, app downloaded and your account registered, now connect the meter to your Android or iOS device.


- Power up the meter.
- Open the Cell LinQ app on your phone.
- The first screen will load a **Connect To Scanner** button - tap the button. Make sure your phones' Bluetooth® is turned on.
- Once connected a **Start Scan** button will appear.

Note: Your Cellular Network Scanner comes with advanced Bluetooth®, allowing distances greater than 30 feet for your phone to stay actively paired with the meter during scans.

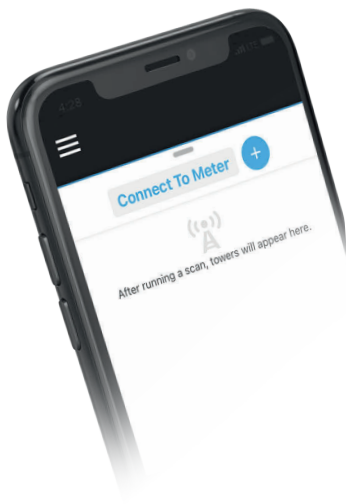


Antenna Connection

Connect the antenna paddle provided in this kit or if there is already a outside antenna installed at a location, the 40 inch cable can be used to connect the pre-installed antenna to the scanner.

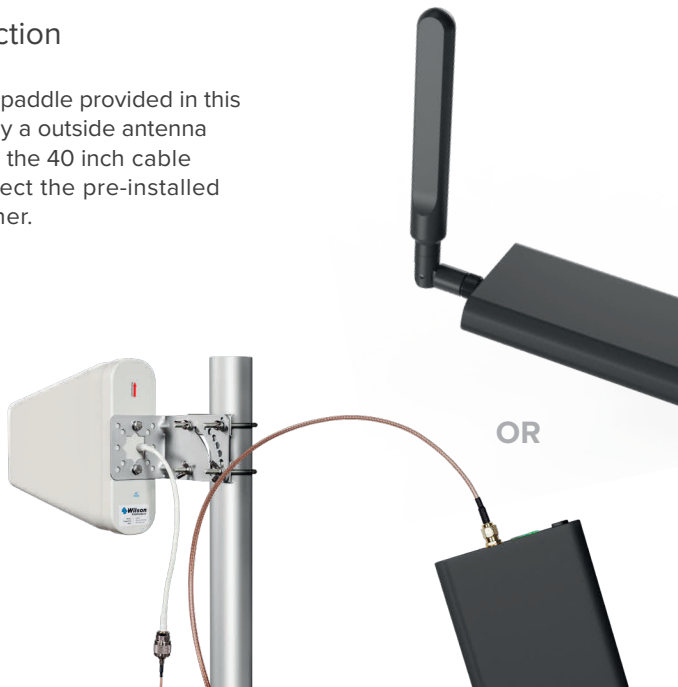

App Screen Examples

Initial Scan

Press the **Start Scan** button within the app. The  will rotate while the scanner gathers Cell Id Data. For the most consistent results, leave the scanner on a flat stationary surface, while scanning is in progress, and stand between 4 and 8 feet away from the scanner, to keep received cellular signals by the phone from interfering with the scan in progress. A complete scan can take up to four minutes.




Scan Results

Scan results will be displayed from carriers by cellular signal strength (RSRP) and quality (RSRQ). Results can be filtered by Carrier, Generations, or Bands. Tap any scan result to see the Detail View.


Note: RSRQ is the most important metric in predicting a reliable cell signal.

RSRQ TABLE	
EXCELLENT Green	≥ -8 dB
GOOD Yellow	-9 dB to -12 dB
POOR Red	< -12 dB

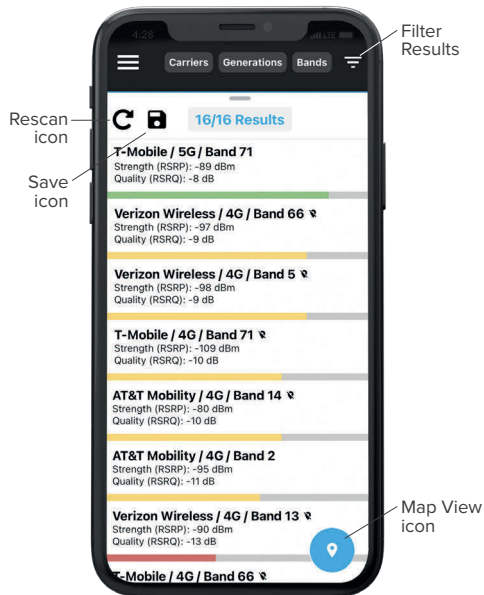

Scan Details


Signal information displays by **Quality**, **Strength**, **DL Frequency**, **Band**, plus additional network information.

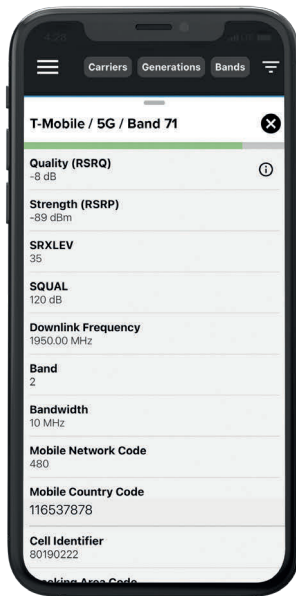


Map View


Tap the Map View Icon to see the approximate cell tower locations for the scan results.

Note: A pin icon with a slash indicates there is no mapping information available for that scan result.

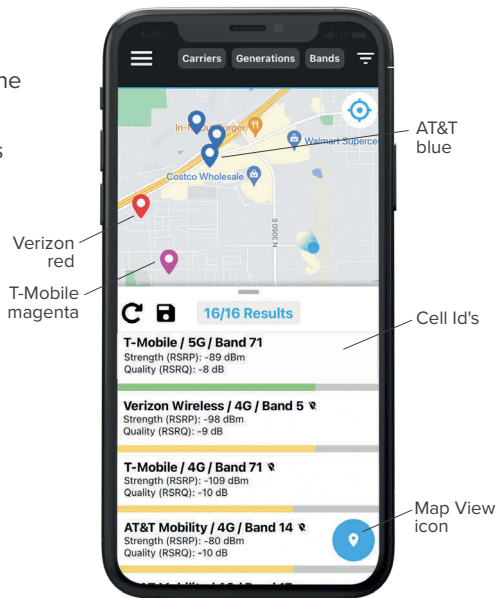


Project Management


Tap the  icon to **customize, organize** and **save** all of your installations to your Cell
LinQ account.

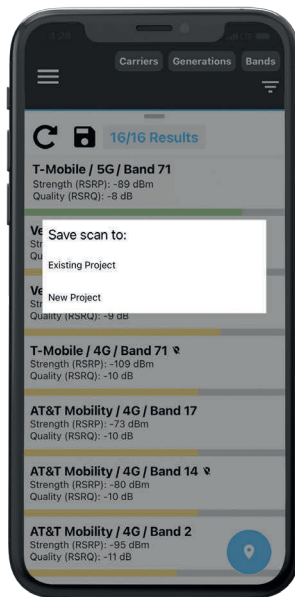


Project Comparison

Tap the  icon to **re-call saved scans** and **compare** before and after a cellular amplifier system has been installed.


Compare icon

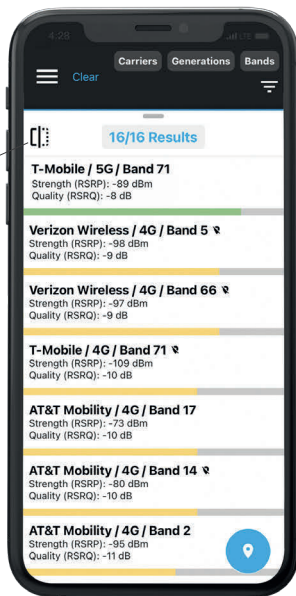

Project Export


Tap the  icon to **export** your projects to a .csv file for your system design. CSV files can then be sent to any email address.


Export icon

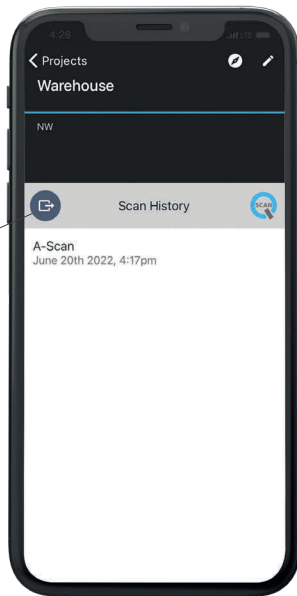

Cell LinQ Outdoor Antenna Wizard Overview


Launching Wizard

Within a Project, tap  icon then tap Open Wizard.

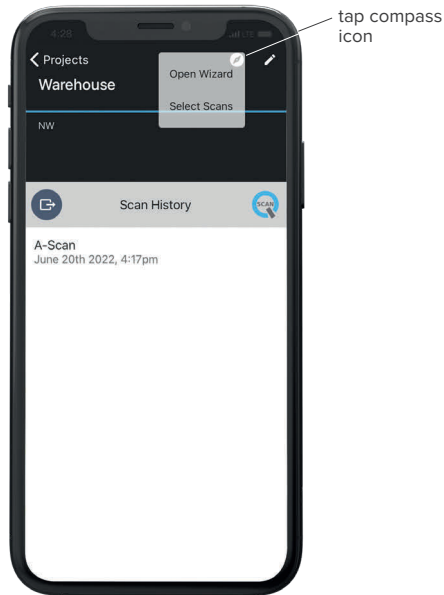

Select Carriers


Select your preferred carriers for the Wizard scan.

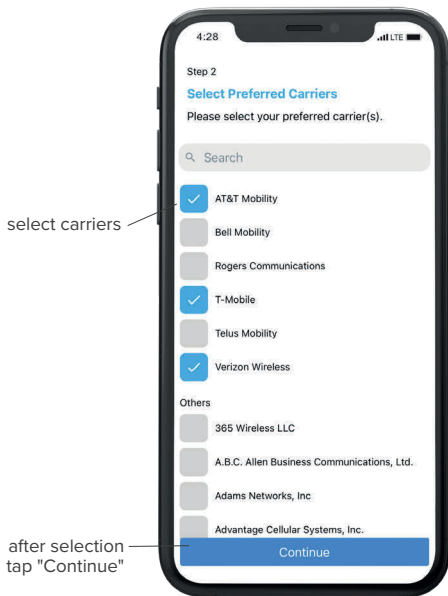

Connect Antenna to Meter

Connect the Cellular Network Scanner to the directional outdoor antenna as illustrated.


tap "Done"
when antenna is
connected to CNS

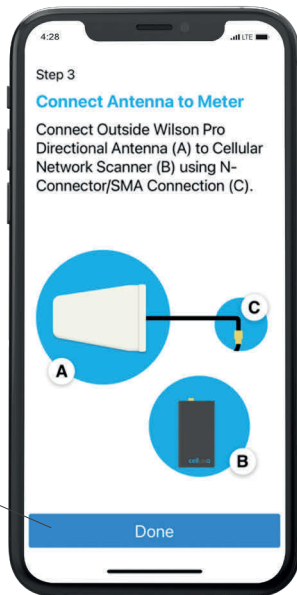

Scanning Directions


Point antenna North, then tap "Start Scan".
Repeat procedure for East, South and West.
Each scan should take approximately
3 minutes.

tap "Start Scan"
when antenna is
pointed in direction

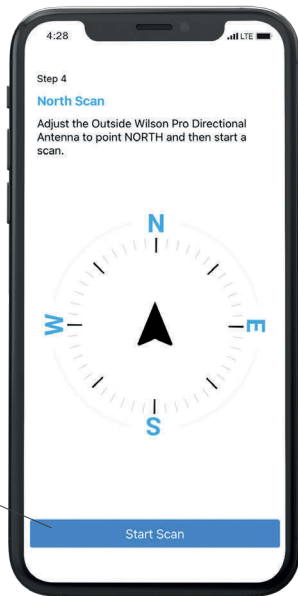

Optimization Result


Results from each directional antenna orientation will then be displayed. For each band shown, the compass direction result represents the best outdoor antenna orientation for that band.

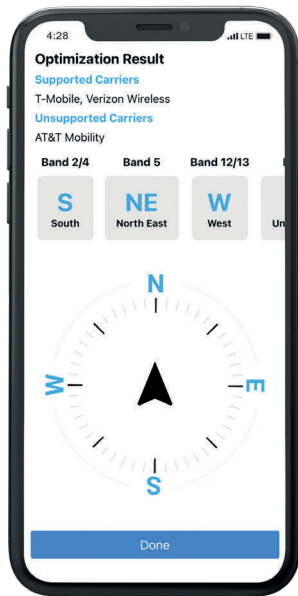

Additional Antenna Details

Tapping the scan results beneath the band numbers will display summary.

tap to get
Summary

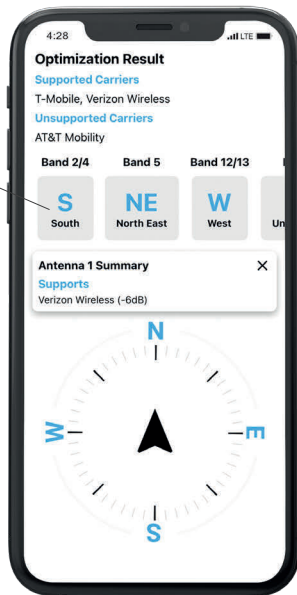

✓ 30 DAY MONEY-BACK GUARANTEE

All WilsonPro products are protected by WilsonPro 30-day money-back guarantee. If for any reason the performance of any product is not acceptable, simply return the product directly to the reseller with a dated proof of purchase.

✓ 3-YEAR WARRANTY

WilsonPro Cellular Network Scanner is warranted for three (3) years against defects in workmanship and/or materials. Warranty cases may be resolved by returning the product directly to the reseller with a dated proof of purchase.

Cellular Network Scanner may also be returned directly to the manufacturer at the consumer's expense, with a dated proof of purchase and a Returned Material Authorization (RMA) number supplied by WilsonPro. WilsonPro shall, at its option, either repair or replace the product.

This warranty does not apply to any Cellular Network Scanners determined by WilsonPro to have been subjected to misuse, abuse, neglect, or mishandling that alters or damages physical or electronic properties.

Replacement products may include refurbished WilsonPro products that have been recertified to conform with product specifications.

RMA numbers may be obtained by contacting Customer Support

DISCLAIMER: The information provided by weBoost is believed to be complete and accurate. However, no responsibility is assumed by weBoost for any business or personal losses arising from its use, or for any infringements of patents or other rights of third parties that may result from its use.

MARKETING APPROVAL: Installer and end customer hereby grants to Wilson Electronics the express right to use installers or end customers company logo in marketing, sales, financial, and public relations materials and other communications solely to identify Customer as a Wilson Electronics customer.

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins or other markings on the paper.



3301 East Deseret Drive, St. George, UT

866.294.1660



www.wilsonpro.com



support@wilsonpro.com

Copyright © 2021 weBoost. All rights reserved. Wilson Electronics products covered by U.S. patent(s) and pending application(s)
For patents go to: weboost.com/us/patents

NOT AFFILIATED WITH WILSON ANTENNA

GDE000549_Rev02_04.12.23