SAY GOODBYE TO DROPPED CALLS



The Sleek 4G-A[™] – Get peak cellular performance in your vehicle for all phones including AT&T LTE devices



Now there's a mobile signal booster for those using AT&T® LTE devices - the Sleek 4G-A from Wilson Electronics. This powerful signal booster helps you stay connected by providing a strong reliable signal in weak-signal areas, reducing lost connections and speeding data rates. It boosts both voice and data communication - making it perfect for phones, data devices and wireless WiFi hotspots.

The Sleek 4G-A works with all devices on all conventional 2G and 3G networks,* as well as the AT&T 4G LTE network. Wilson signal boosters feature cell site protection technologies refined over more than a decade of research and development. Optional indoor accessory kit allows use at home or in the office.

*except Nextel/iDEN

ctronics. Inc

SCAN FOR MORE INFO




www.wilsonelectronics.com





INSTALL DIAGRAM

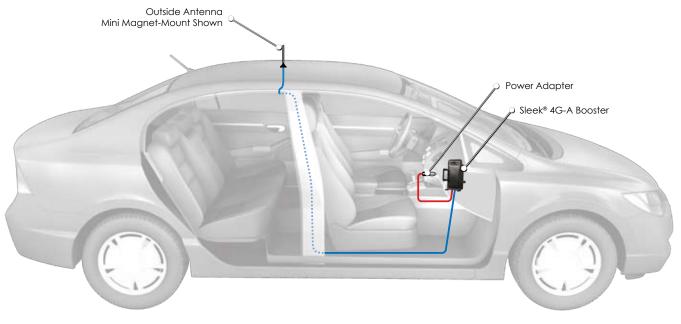

All components shown are included in kit 815326 For indoor use see kit 859970

		L	
Part Number	815326		
Frequency	698 - 716 MHz 728 - 746 MHz	824-894 MHz	1850-1990 MHz
Gain	26 dB		
Max Uplink Power	750 mw	1240 mw	1800 mw
Noise Figure	5.0 dB nominal	3.0 dB nominal	3.0 dB nominal
Flatness	±4 dB		
Power Requirements	5V DC		
Connectors	Antenna: SMA Female • Power adapter: Mini USB		
Dimensions	2.25 x 4.25 x 2.5 (inch) 5 x 9.5 x 5.6 (cm)		
Weight	2.5 (oz) / 0.07 (kg)		

SPECIFICATIONS

BENEFITS & FEATURES

- Boosts AT&T* 700 MHz LTE as well as 3G & 2G cellular signals on 800 MHz & 1900 MHz
- Boosts both voice and data communications
- Provides a strong, reliable signal in weak signal areas
- Faster, cleaner 3G & 4G data transfers
- More than 20 times the power of your cell phone alone
- Extends device battery life
- Simple DIY installation

