

Pro 1000C

Includes **WilsonPro Cloud Service Integration**

FEATURES

- +15 dBm maximum downlink power
- XDR technology: never shuts down, even with very strong outside cellular signals
- Full color display, indicating gain and power levels of each band, for easy antenna setup
- Compatible with all U.S. cellular networks
- Integrated power supply
- New! Pro 1000C connects to **WilsonPro Cloud** via an LTE connection through the outside donor antenna, or through a traditional RJ-45 “hardwired” ethernet connection.
- Annual **WilsonPro Cloud** subscription includes wireless LTE connection; no additional internet connection required
- Provides installers & integrators with a recurring revenue stream by selling extended service plans
- Provides end users with high reliability and minimal downtime



⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

Kit Includes



Pro 1000C
Booster



Outside
Directional Antenna
(314411)



Inside Dome
Antenna
x1 (304412)



Lightning Surge
Protector
(859902)



2ft Low-Loss
Wilson400 Cable
(952302)



75ft Low-Loss
Wilson400 Cable
(952375)



100ft Low-Loss
Wilson400 Cable
(952300)

About

The **WilsonPro Pro 1000C** passive distributed antenna system is a wall mounted cellular amplifier designed to provide enhanced in-building cellular coverage for all commercial spaces, including large homes, hospitals, hotels, warehouses and offices.

The WilsonPro Pro 1000C amplifies weak cellular signals to provide reliable voice and data coverage—including 4G – to inside spaces where signals may not penetrate and With new eXtended Dynamic Range (XDR) technology, the amplifier never shuts off due to a strong outside signal or changes in outside signals.

Like all WilsonPro cellular signal boosters, the WilsonPro Pro 1000C features cell site protections that auto-detect and prevent any cell tower interference.

Specifications

MODEL NUMBER	460242	
FREQUENCIES	Band 12	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	70 dB	
IMPEDANCE	50 Ohm	
POWER	110 - 240 V AC, 50 - 60 Hz, 30 W	
CONNECTORS	N-Female	
BOOSTER DIMENSIONS	3.75 x 11.5 x 18 in	
BOOSTER WEIGHT	15.4 lbs	

SKU: 460242

PRO 70 1000C



Detailed Specifications

		1000C				
Model Number	460242					
FCC ID	PWO460042					
Connectors	N-Female					
Antenna Impedance	50 Ohms					
Frequency	698-716 MHz, 729-746 MHz, 777-787 MHz, 824-894 MHz, 1850-1990 MHz, 1710-1755/2110-2155 MHz					
Power output for single cell phone (Uplink) dBm	700MHz Band12/17	700MHz Band13	800MHz	1700MHz	1900MHz	
	20.9	22.9	22.70	24.30	21.70	
Power output for single cell phone (Downlink) dBm	700MHz Band12/17	700MHz Band13	800MHz	2100MHz	1900MHz	
	16.7	15.0	16.0	16.4	15.5	
Noise Figure	5 dB nominal					
Isolation	> 90 dB					
Power Requirements	12V 3A					

Each Signal Booster is individually tested and factory set to ensure FCC compliance. The Signal Booster cannot be adjusted without factory reprogramming or disabling the hardware. The Signal Booster will amplify, but not alter incoming and outgoing signals in order to increase coverage of authorized frequency bands only. If the Signal Booster is not in use for five minutes, it will reduce gain until a signal is detected. If a detected signal is too high in a frequency band, or if the Signal Booster detects an oscillation, the Signal Booster will automatically turn the power off on that band. For a detected oscillation the Signal Booster will automatically resume normal operation after a minimum of 1 minute. After 5 (five) such automatic restarts, any problematic bands are permanently shut off until the Signal Booster has been manually restarted by momentarily removing power from the Signal Booster. Noise power, gain, and linearity are maintained by the Signal Booster's microprocessor.

The Manufacturer's rated output power of this equipment is for single carrier operation. For situations when multiple carrier signals are present, the rating would have to be reduced by 3.5 dB, especially where the output signal is re-radiated and can cause interference to adjacent band users. This power reduction is to be by means of input power or gain reduction and not by an attenuator at the output of the device.

WilsonPro Cloud provides:

- Customizable email and text alert notifications, including:
 - Amplifier goes offline
 - Oscillation occurs
 - Weak or no signal detected
 - Performance and signal level reporting and history
 - Report generation
- Donor antenna "tuning" tool
- Organization of monitored amplifiers by customer and location
- Ability to remotely turn bands on and off, and remote amplifier reset


Package Dimensions

19.5 L x 19.5 H x 28 W

28 in. x 19.5 in.	19.5 in. x 19.5 in.	28 in. x 19.5 in.	 TBD lbs.
FRONT	SIDE	TOP/BOTTOM	WEIGHT

MASTER CARTON: None

Support


 3 Year Warranty from Purchase.

Website: www.wilsonpro.com/support

Phone: +1 866 294 1660

Monday to Saturday

UPC

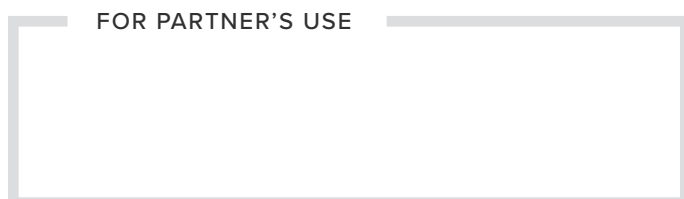

460242_1000C_SS_Rev02_US_0816718